


Prod. Ref. FW030-000
Safety cat. S1PS SC FO SR
Range of sizes 36 - 48 (3 - 13)
Weight (sz. 8) 615 g
Shape B
Width 11

Description: Black/grey suede leather and breathable textile ankle boot, **SANY-DRY®** lining, anti-shock, antistatic, slipping resistant, non metallic **APT Plus** midsole **Zero Perforation**

Plus: METAL FREE. EVANIT footbed, made of EVA and nitrile special compound, with high bearing capacity and variable thickness. Thermoformed, punched and coated with highly breathable fabric. Antistatic thanks to a specific treatment on the surface and to seams made of conductive yarns. Dual density PU with an aggressive style. The prominent toe cap and heel area protect the upper from wearing and abrasion

Suggested uses: Warehouses, transportation sector, industries

Care and maintenance: Clean after each use and dry off away from direct heat. Avoid contact with aggressive chemicals or extreme temperature. Avoid immersion in sea water, lime water or cement mixed with water

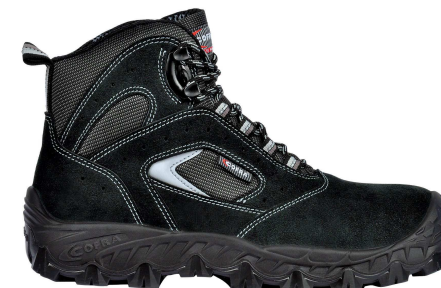

MATERIALS / ACCESSORIES

SAFETY TECHNICAL SPECIFICATIONS

		Clause EN ISO 20345:2022	Description	Unit	Cofra result	Requirement
Complete shoe	Toe cap: non metallic FIBERGLASS toe cap, impact resistant until 200 J and compression resistant until 1500 kg	5.3.2.6	Shock resistance (clearance after shock)	mm	14,5	≥ 14
		5.3.2.7	Compression resistance (clearance after compression)	mm	15	≥ 14
	Anti perforation midsole: in multi-layers highly tensile fabric, penetration resistant, Zero Perforation	6.2.1	Penetration resistance (PS requirement with Ø 3,0 mm nail)	N	To 1100 N No perforation	≥ 1100
	Antistatic shoe: the bottom is fit for the dissipation of electrostatic charges	6.2.2.2	Electric resistance			
			- wet	MΩ	12,59	≥ 0.1
			- dry	MΩ	43,17	≤ 1000
	Energy absorption system	6.2.4	Shock absorption	J	26	≥ 20
Upper	Black suede leather	5.4.6	Water vapour permeability	mg/cmq h	> 7,5	≥ 0,8
	Thickness 1,6/1,8 mm		Permeability coefficient	mg/cmq	> 65,3	≥ 15
Upper	Black/grey breathable textile	5.4.6	Water vapour permeability	mg/cmq h	> 24	≥ 0,8
			Permeability coefficient	mg/cmq	> 192,3	≥ 15
Vamp	Textile, breathable, abrasion resistant, colour black	5.5.4	Water vapour permeability	mg/cmq h	> 20,9	≥ 2
	thickness 1,2 mm		Permeability coefficient	mg/cmq	> 169	≥ 20
Quarter	SANY-DRY® , breathable, abrasion resistant, colour black	5.5.4	Water vapour permeability	mg/cmq h	> 22	≥ 2
	thickness 1,2 mm		Permeability coefficient	mg/cmq	> 177,9	≥ 20
Sole	Antistatic double-density Polyurethane directly injected in the upper:	5.8.4	Abrasion resistance (lost volume)	mm³	126	≤ 150
	Outsole: black, high density, slipping resistant, abrasion	5.8.5	Flexing resistance (cut increase)	mm	2,1	≤ 4
	Midsole: black, low density, comfortable and anti-shock	5.8.7	Interlayer bond strength	N/mm	4,2	≥ 3
		6.4.2	Hydrocarbons resistance (ΔV = volume increase)	%	5	≤ 12
	Adherence coefficient of the sole (Slip resistance)	5.3.5.2	ceramic + detergent solution – forepart (contact angle 7°)		0,41	≥ 0,36
			ceramic + detergent solution – heel (contact angle 7°)		0,35	≥ 0,31
		6.2.10	SR : ceramic + glycerol – forepart (contact angle 7°)		0,24	≥ 0,22
			SR : ceramic + glycerol – heel (contact angle 7°)		0,21	≥ 0,19